

TOSHIBA



x3000

For dazzling true colours.

- Unique image quality by NCE 3™-chip
- Attractive design
- High security by password function and panellock




LCD stands for Liquid Cristal Displays
NCE 3: Colour optimization by Toshiba
for LCD projectors



x3000

Immerse yourself
in a world of colour.

- Display** 0.7" LCD Chip
- Resolution** XGA 1,024 x 768
- Brightness** 3,000 ANSI-lumens
- Colour reproduction** 16.7 mio. colours
- Contrast** 600 : 1
- Projection format** 4 : 3 switchable to 16 : 9
- Lamp** 220 W (TLPLW12LAMP)
- Max. lamp life** up to max. 2,000 hours/
up to max. 3,000 hours in ECO mode
- Lens** F = 1.8 - 2.1 / f = 26.5 - 31.5 mm, manual focus and zoom
- Zoom** 1.2 x
- Frequency (hor./vert.)** 16 - 106 kHz / 50 - 85 Hz
- Projection** front, rear and ceiling
- Digital keystone correction** auto vertical +/- 30°
- Picture size (diagonal)** 0.84 m - 7.62 m
- Projection distance** 1.45 m - 11.29 m
- Input signals** NTSC / PAL / SECAM, 480i, 480p, 576i, 576p, 720p, 1.080i, VGA / SVGA, XGA / SXGA / UXGA (compr.)
- Inputs** RGB (D-sub 15), S-video, composite video (1 x RCA), RGB audio (stereo mini jack), video / S-video audio (1 x RCA L/R)
- Outputs** RGB (D-sub 15), audio (stereo mini jack)
- Serial interface** RS-232C (mini DIN8 pin)
- Power supply** AC 100 - 240 V, 50 / 60 Hz
- Loudspeaker** 1 W mono
- Dimensions (W x H x D)** 288 x 92 x 247 mm
- Weight** 2.8 kg
- Operation noise** standard 34 dB / ECO mode 29 dB
- Specials** security-function, user logo, password, panellock, NCE 3, with detachable control panel, quick start / instant shut down (5 sec.), black board-function
- Accessories** mouse remote control with laserpointer and batteries, owners manual (CD ROM), quick reference, RGB and power cable, softcase
- Options** ceiling mounting, trolley, spare lamp, camera c001

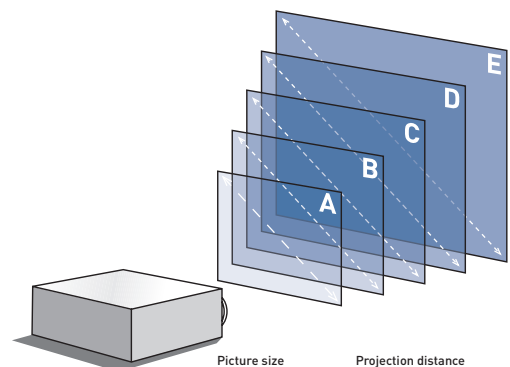

Picture size	Projection distance
A 0.84 m	1.45 m
B 1.52 m	2.21 - 2.66 m
C 2.54 m	3.72 - 4.47 m
D 5.08 m	7.51 - 9.01 m
E 7.62 m	11.29 m