

TS Lightning™ Interactive Whiteboard

Interact
Explore
Enlighten



Interruption-free meetings
and classes



Interactive Projection on a
Touch-sensitive Surface



Improve Group Interactivity

Calibration-free

Introducing PolyVision's TS Lightning Interactive Whiteboard - the world's first calibration-free interactive whiteboard. TS Lightning eliminates the need to perform the four to sixteen point calibration of standard interactive whiteboards so you can enjoy interruption-free meetings and classes! If your projected image is ever out of alignment, simply press the projection icon on the TS Series icon strip. Lightning's Photonic Array Technology™ allows you to begin using the board instantly.

Keep Your Audience Focused

TS Lightning boards include all the benefits of the regular TS Series, helping to dramatically improve group interactivity by allowing participants to listen and engage.


The TS Series digitally captures any notes written or projected onto the board, so your audience can focus on the session content rather than concentrating on taking notes. Notes can be provided in your choice of format: via e-mail, Internet, intranet, or printed copies.

Maintain Message Consistency

There is little room for miscommunication when all session participants have the same notes; simply save your work to a computer for later distribution. Plus it's easy to review notes and annotations made during previous sessions and update presentations accordingly, eliminating the time crunch of preparing digital presentations.

TS Lightning Interactive Whiteboard:
Present a calibration-free experience.

POLYVISION®
A Steelcase Company

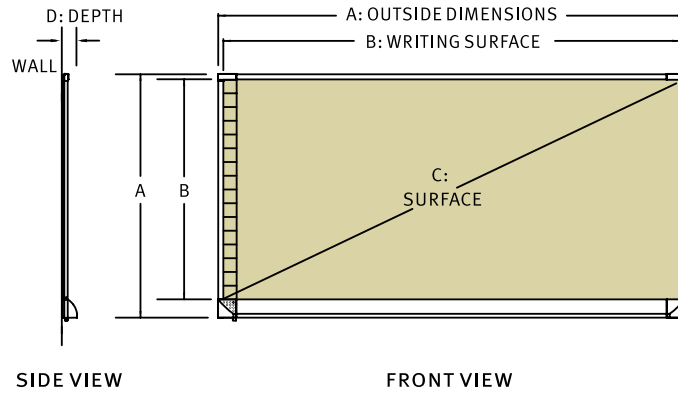

| Interactive Whiteboard | Model TSL 410 | Model TSL 610 | Model TSL 810 |
|------------------------|--|--|--|
| Dimension A (HxW) | 39.7 in. x 47.0 in. (1010mm x 1190mm) | 47.7 in. x 67.0 in. (1210mm x 1700mm) | 47.7 in. x 97.0 in. (1210mm x 2460mm) |
| Dimension B (HxW) | 35.0 in. x 45.0 in. (889mm x 1140mm) | 43.0 in. x 65.0 in. (1090mm x 1650mm) | 43.0 in. x 95.0 in. (1090mm x 2410mm) |
| Dimension C (Diagonal) | 56.9 in. (1446mm) | 77.8 in. (1976mm) | 104.3 in. (2649mm) |
| Dimension D (Depth) | 3.0 in. (76.2mm) | 3.0 in. (76.2mm) | 3.0 in. (76.2mm) |
| Resolution | 8000 x 8000 | 8000 x 8000 | 8000 x 8000 |
| Weight | 30 lbs. (13.62 kg) | 55 lbs. (24.97 kg) | 70 lbs. (31.78 kg) |

Surface material

Touch-sensitive, low-glare, stain-resistant Teflon® surface

Connection

- USB connection to computer
- No external power required

Certification

CE, FCC Class A, RoHS

Warranty

Two-year limited warranty, free upgrade to five years upon product registration

Accessories (Included)

- User Guide
- 3.25 in. (830mm) round eraser
- 15 foot (5m) USB cable
- Stylus

Features

- Use projector without calibration
- Easy to use icon strip
- Webster® software included
- Transfer images via drag & drop, clipboard, or file export
- Anti-aliased markup including highlighters
- Real-time playback
- Multiple monitor support
- Save images in JPG, BMP, TIFF, WMF, HTM, PDF, PCT, MacPaint, PSD, PNG, Quicktime Image, and TGA formats

Recommended Computer Requirements

Microsoft Windows®:

- Windows 98, 2000, ME, XP, or Tablet XP
- 128 MB RAM
- One available USB port

Apple Macintosh®:

- Power PC or Intel processor
- Mac OS 10.2 or higher
- 256 MB RAM (higher screen resolutions require more memory)
- One available USB port

Options

- Mobile stand - supports models TSL 410 and TSL 610 (MS Series)
- RM Easiteach® Studio educational software (TSL ET Series)

Authorized PolyVision Dealer

PolyVision Corporation
1.800.620.POLY
info@polyvision.com
www.polyvision.com

POLYVISION
A Steelcase Company